

# ALUMINUM UTILITY TRAILERS

The American Standard in Aluminum Trailers



**FLATBED, UTILITY &  
OPEN AUTO TRANSPORT**

**SUPERIOR QUALITY  
YOU DESERVE IN:**

- ABOVE TIRE FLATBEDS
  - LOW PROFILE
  - HOT SHOT
  - SKID LOADER
  - HEAVY-DUTY UTILITY
  - OPEN AUTO TRAILERS
  - DUMP BEDS
- AND MORE!**

**THE CLOSER YOU LOOK,  
THE MORE YOU'LL  
LIKE ALUM-LINE.**

When you choose ALUM-LINE, you are buying unmatched quality, strength, and lifelong value not found in other trailers. Don't be fooled by others that claim to be all-aluminum. You need to look deeper. ALUM-LINE is built with two separate mainframe extrusions. The outer perimeter rail is the foundation to the strength of the trailer. The second extrusion is our exclusive tongue and groove aluminum flooring. Both extrusions have been tested to exceed the axle capacities of the trailer you select.

We build for commercial use – you'll find more welding and workmanship in the details. We pride ourselves on the little things: stainless steel fasteners, enclosed electrical wiring, quality built axles, tires, and a top notch light package.

ALUM-LINE – a safe and worry-free trailer you can buy with confidence.

**ALUM-LINE**  
Where Workmanship Lasts a Lifetime

P.O. BOX 59    CRESCO, IA 52136    563-547-3247 PH    563-547-5366 FX    [alumline@alumline.com](mailto:alumline@alumline.com) EMAIL

# ALUM-LINE Trailers Are Built for a Lifetime of Use



## FLAT BED TRAILERS

### STANDARD FEATURES

- all-aluminum heavy-duty construction
- super structure under platform including 1/2" x 10" aluminum channel – hitch or nose assembly reinforced with steel to super structure
- 5" x 3 1/2" x 1/2" thick side and end rails (3" I-beam crossmembers on 24" centers with wood floor)
- tongue and groove aluminum flooring – crossmember built into flooring every 4"
- overall width with rib rail 101 1/2"
- includes 2" rub rail with heavy duty stake pockets on 24" centers
- all seal beam lighting, breakaway switch with battery
- two 7000# torsion axles with four ST235/80R16 10 ply tires
- adjustable gooseneck stem coupler and jack stand, 2 5/16" ball hitch
- optional beavertail is easy lift or solid down, includes heavy duty slide-out ramps

### WORKMANSHIP



- 5-year written warranty

### SIZES

- gooseneck and bumper pull models:
  - deck width 96", with rub rail 101 1/2"
  - lengths from 16' to 42' plus 8' nose on GN models
- low profile models:
  - 80" between fenderwells
  - lengths from 16' to 42'

### OPTIONS

- 7' aluminum deck over GN (tapered)
- 5' dove tail (solid with ramps)
- 5' dove tail (expandable floor w/ramps)
- flip-over aluminum ramps with lift-up middle
- 8000# axles
- four – 17.5/215-75 16 ply tires and rims
- 10000# single tire axles, or 1000# dual tandem axles
- hydraulic brakes – 2 axles
- electrohydraulic brakes 7K – 10K (2 axles)
- add for bridging over 28' lengths (includes dual landing legs)
- 2" wood floor with crossmembers on 12" centers
- recessed 3500# stainless steel swivel tie rings
- 2 speed double drop leg jack
- plus much more

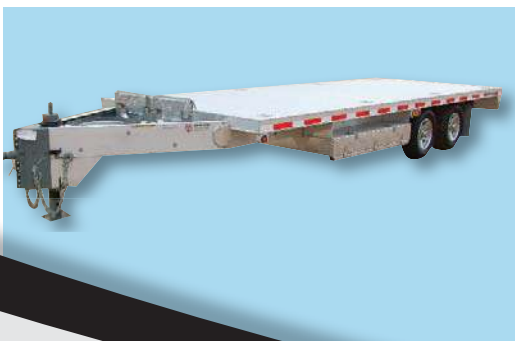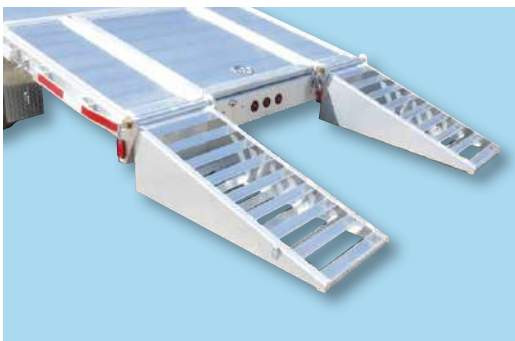

VISIT OUR WEBSITE: [www.alumline.com](http://www.alumline.com)

ORDER TOLL FREE 1-800-446-1407